



ROMAN BLINDS RAFFTRIC

SYSTEMS | ROMAN BLINDS | RAFFTRIC

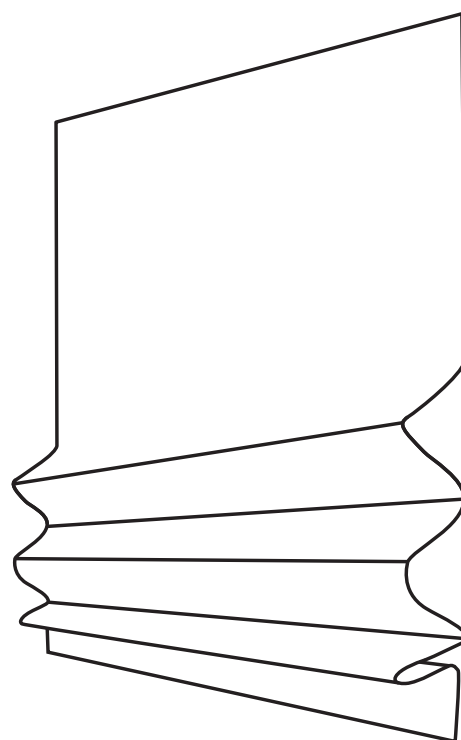

création **baumann**

OVERVIEW

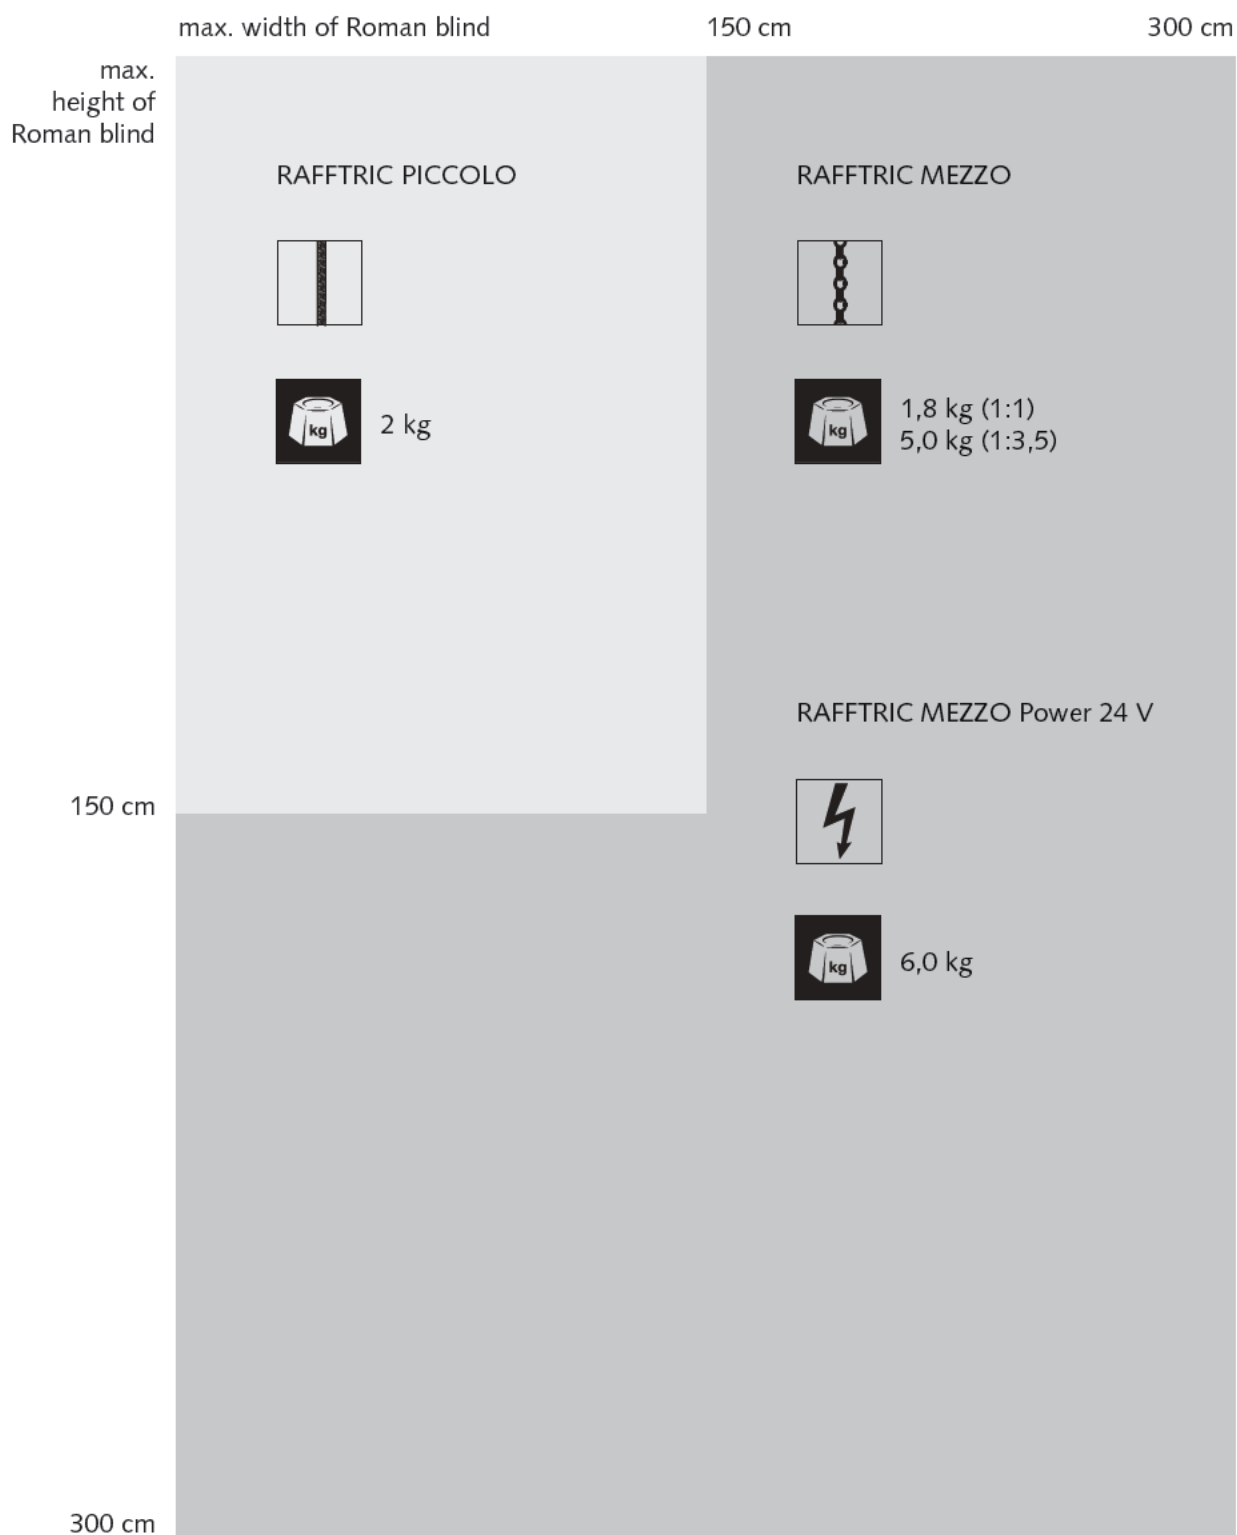

Operation:



Draw cord



Chain



Motor drive


ROMAN BLIND SYSTEMS

An exceptional range of Roman blinds from Création Baumann, offering many window design possibilities. A choice between different system types for optimum use at the window.

The Création Baumann fabric collection includes a wide range of plain colours and beautifully-designed patterns, incorporating colours, motifs and materials to suit the multi-layered effect of Roman blinds.


RAFFTRIC PICCOLO

Page 7




RAFFTRIC MEZZO

Page 10



RAFFTRIC MEZZO POWER 24 V

Page 13





RAFFTRIC MAKING-UP/ ACCESSORIES

Page 16

MEASURING AND INSTALLATION


Page 18

RAFFTRIC PICCOLO TECHNIQUE

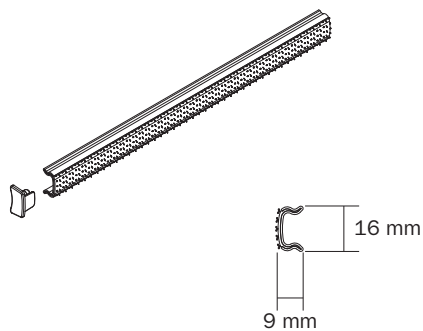

Profile An ultra-flat aluminium profile with hook-and loop tape for small roman blinds, ideally suited for direct attachment to window frames.


Colours Standard white RAL 9016

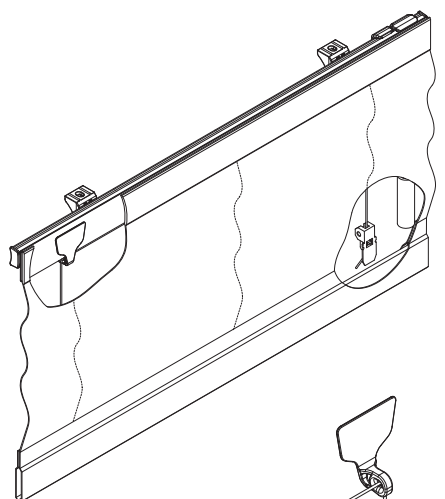

Size of system Width up to max. 150 cm
Height up to max. 150 cm

Weight of curtain max. 2 kg

Function Sewn-in eyelets for direct control of the draw cords on the curtain

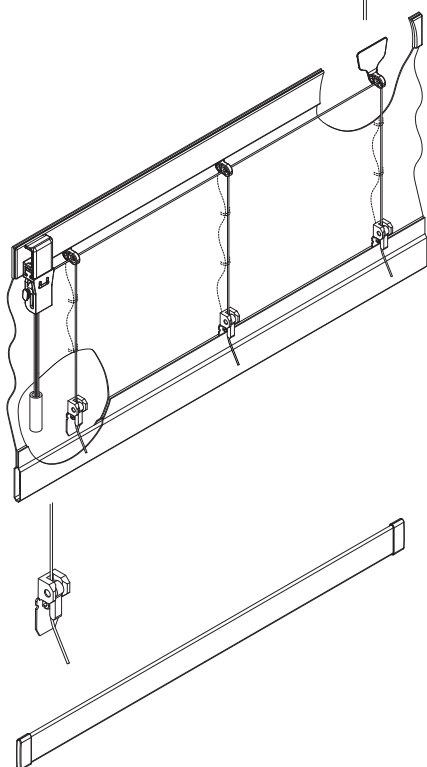


Bottom weight Flat aluminium profile
3 x 25 mm

Operation Draw cord white
Installation either left or right





RAFFTRIC PICCOLO TECHNIQUE

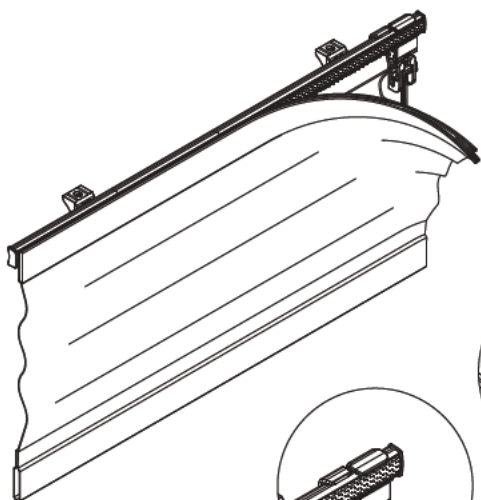

Cleaning the
curtain

Take the fabric off the system:

1. Pull the curtain downwards and out
2. Take the cord out of the cord closure
3. Take the blind off the aluminium profile/hook-and-loop tape at the top

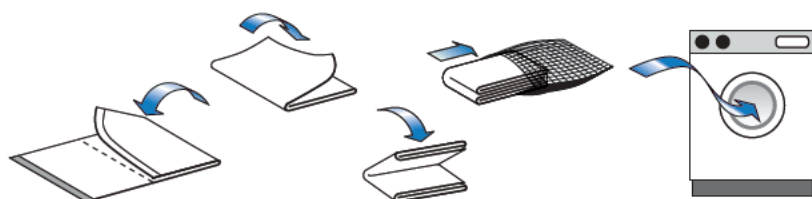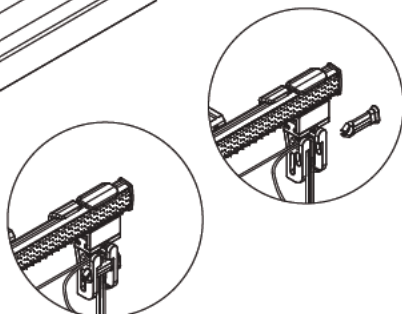



Wash the curtain

After washing:


1. Fix the curtain onto the hook and loop-tape
2. fit the draw cord into the cord closure
3. The system is then ready to use

Width up to cm	40	70	100	130	150	Arrangement of tapes/brackets
Number of tapes	2	3	4	5	6	
number of brackets	2	2	3	3	3	

RAFFTRIC PICCOLO INSTALLATION





measure in mm





Wall clip Plastic, direct installation on wall/
window frame

Colours white



Ceiling clip Plastic, direct installation on ceiling







Colours white

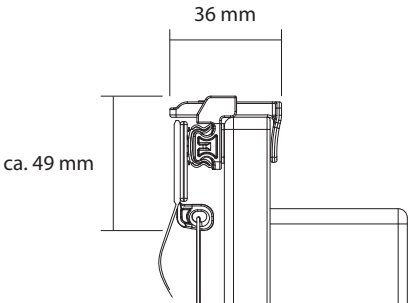

Clamping carrier Plastic, direct installation on window
sash, no screws needed

Colours white

RAFFTRIC MEZZO TECHNIQUE

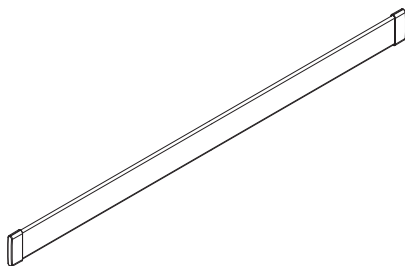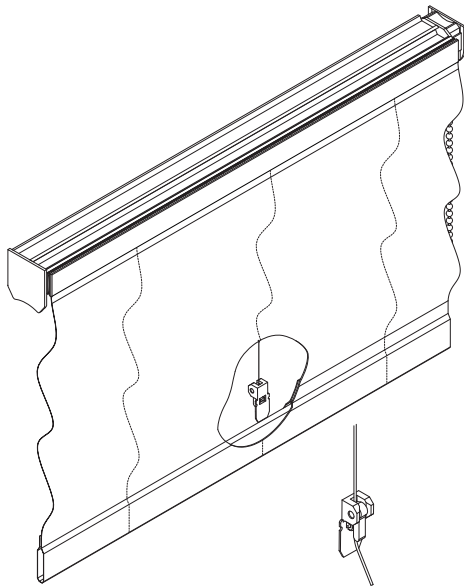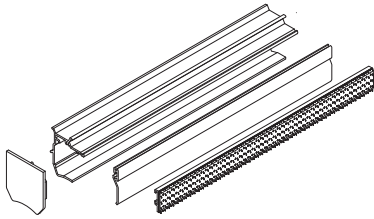

Profile Stable aluminium profile, 3 parts (head, cover, hook-and loop-tape) for medium-weight and heavy roman blinds.

Curtains are quick and easy to remove for cleaning, thanks to the user-friendly click mechanism with cord-clip.

Colours Standard white RAL 9016
Standard anodized aluminium/grey

Size of system Width up to max. 300 cm
Height up to max. 300 cm

Weight of curtain Gear drive 1:1 max. 1,8 kg
Gear drive 1:3,5 max. 5,0 kg

Function Cord spool with cord clip for simple insertion and removal of draw cord

Bottom weight Flat aluminium profile 3 x 25 mm

Operation A Nickel-plated metal chain
B transparent Plastic chain


white
grey

either right or left

weight of chain in stainless steel
INOX 90 weight 90 g
INOX 35 weight 35 g

Factory-made installation of endless-chain


RAFFTRIC MEZZO TECHNIQUE

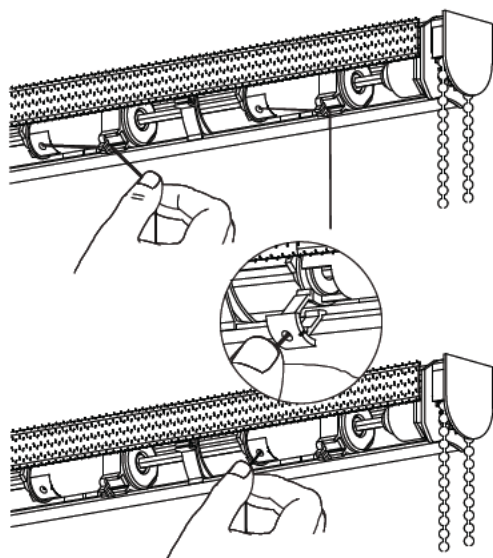


Cleaning the
curtain

Take the fabric off the system

1. Pull the curtain completely downwards and out
2. Take the blind off the aluminium profile/hook-and-loop tape at the top
3. Take the cord out of the locking mechanism
4. Pull the cord clip out of the cord spool

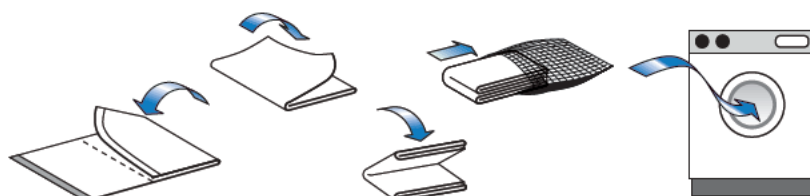


Wash the fabric

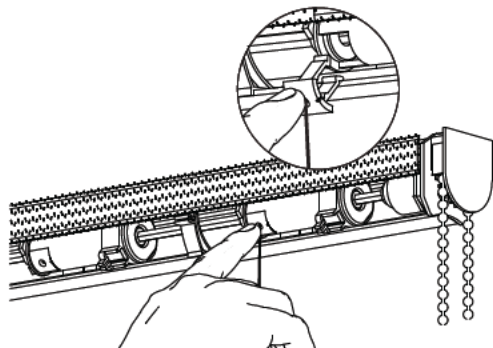

After washing:


1. Press the cord clip into the cord spool
2. Fit the cord into the locking mechanism
3. Fix the curtain onto the hook-and-loop tape
4. The system is then ready to use

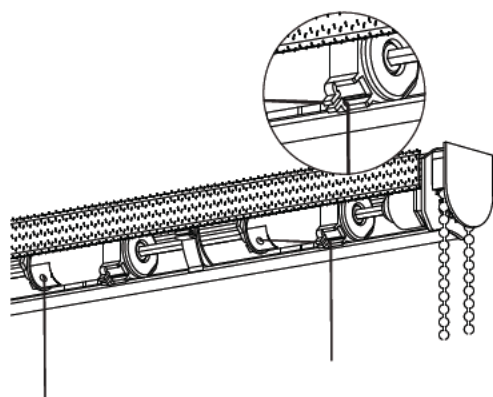

Width up to cm	90	130	170	210	250	300
Number of tapes	3	4	5	6	7	8
number of brackets	2	3	3	3	4	4


Arrangement of
tapes/brackets

RAFFTRIC MEZZO INSTALLATION




Clip Spring steel, for ceiling and wall instal-
lation

Colours Standard stainless steel
Standard white


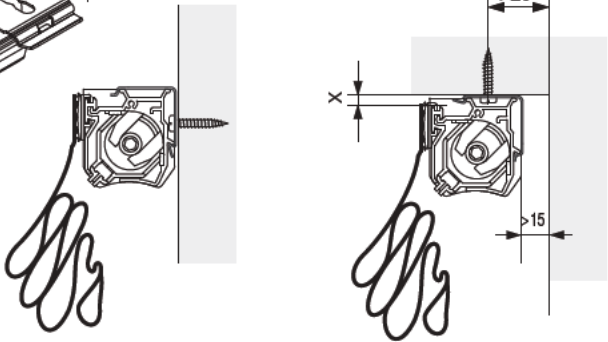


measure in mm




Wall bracket Metal, with pre-assembled clip
25 mm

Colours Standard galvanized
Standard white





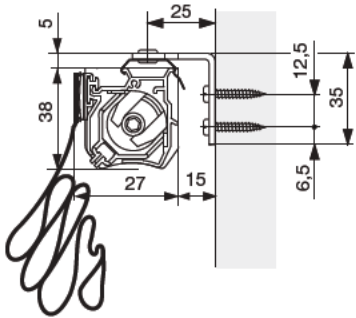


Wall bracket Metal, with pre-assembled clip
60-108 mm

Colours Standard galvanized
Standard white

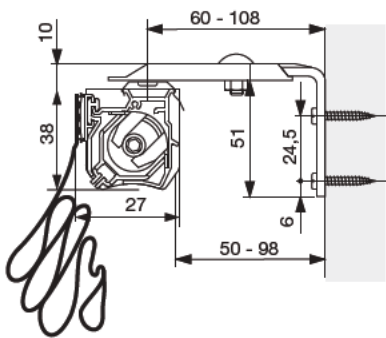

RAFFTRIC MEZZO POWER 24 V TECHNIQUE

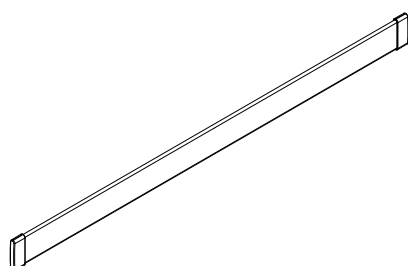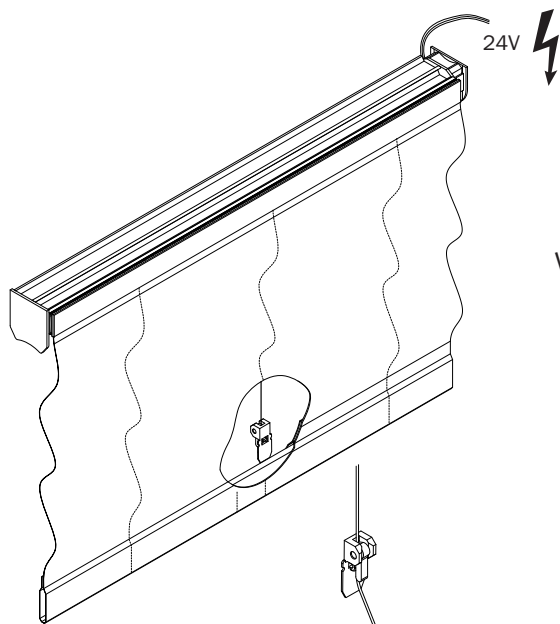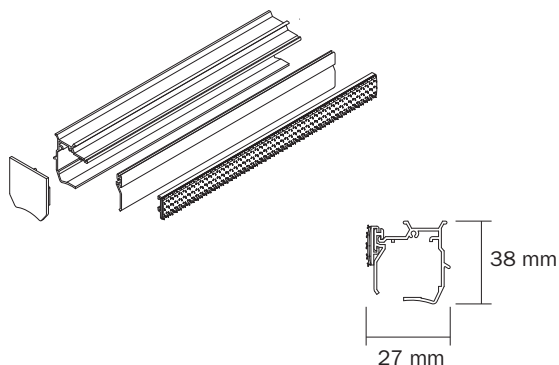

Profile Stable aluminium profile, 3 parts (head, cover, hook-and loop-tape) for medium-weight and heavy roman blinds.

Curtains are quick and easy to remove for cleaning, thanks to the user-friendly click mechanism with cord-clip.

Colours Standard white RAL 9016
Standard anodized aluminium/grey

Size of system Width up to max. 300 cm
Height up to max. 300 cm

Weight of curtain max. 6 kg

Function Cord spool with cord clip for simple insertion and removal of draw cord



Bottom weight Flat aluminium profile 3 x 25 mm

Motor 24-Volt DC motor
Minimum electric tension 20 V
Nominal current 0.50 Amp.
Rotations/minute 30
Length of electric cable 250 cm
With overload protection

somfy®

Pay attention to the wire cross section!


RAFFTRIC MEZZO POWER 24 V TECHNIQUE



Stopper top/
bottom


Setting up of upper and lower limit
stop at the factory, fine adjustment on-
site possible

Remove curtain from system, washing
instruction see Rafftric Mezzo

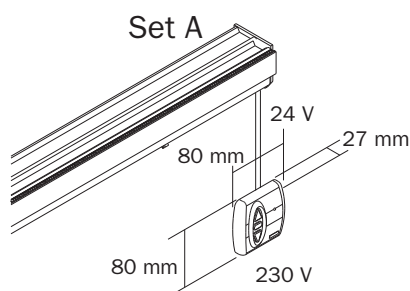


Operation/
controller

Set A:
Switch with integrated transformer
(INIS DC) 230/24 volt, colour white

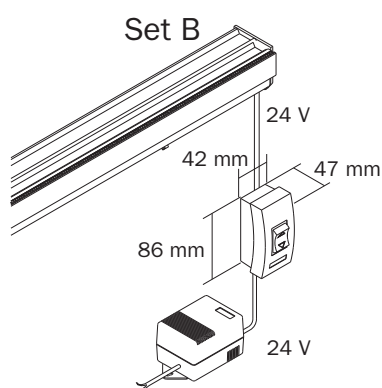

Set B:
White pole reverser switch 230/24 volt
black transformer with 230 volt cable/
connector (cable length 200 cm) as
well as 24 volt cable (cable length
200 cm)

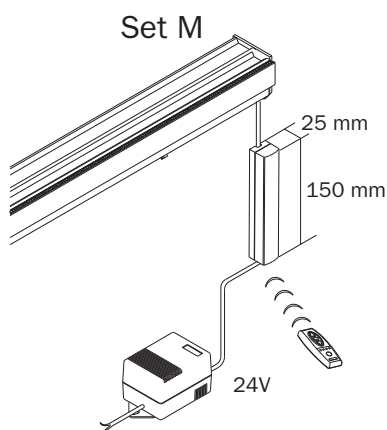





Set M:
Radio receiver set (DC-RTS) 24 volt
white version with 1-channel white ra-
dio hand-held transmitter (Telis 1 RTS)
and 230/24 volt black transformer with
230 volt cable/connector (cable length
200 cm) as well as 24 volt cable (cable
length 200 cm)

Group control

Group control as of two installations
upon inquiry

Width up to cm	90	130	170	210	250	300	Arrangement of tapes/brackets
Number of tapes	3	4	5	6	7	8	
number of brackets	2	3	3	3	4	4	

RAFFTRIC MEZZO POWER 24 V INSTALLATION

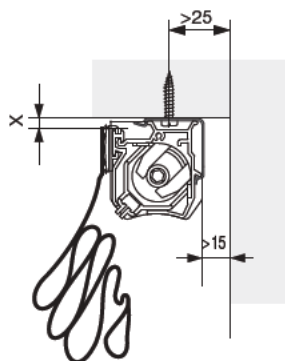



measure in mm

Clip Spring steel, for ceiling and wall installation



Colours Standard stainless steel
Standard white

SYSTEMS | ROMAN BLINDS | RAFFTRIC

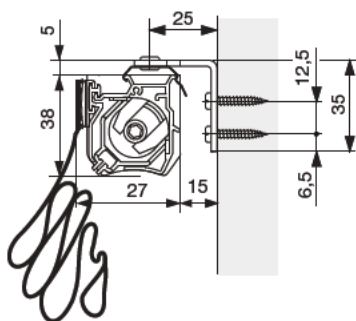

Wall bracket 25 mm Metal, with pre-assembled clip


Colours Standard galvanized
Standard white

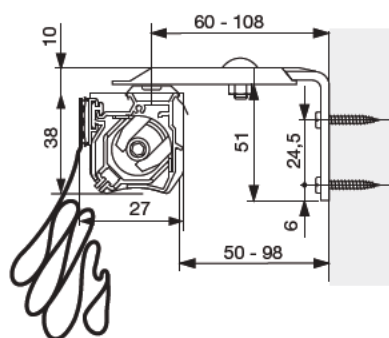

Wall bracket 60-108 mm Metal, with pre-assembled clip


Colours Standard galvanized
Standard white

RAFFTRIC MAKING-UP

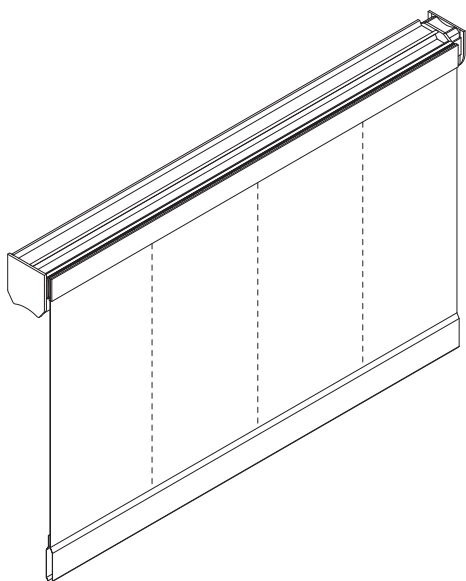

Making-up type A

Reverse surface, vertical, sewn-on,
transparent loop tape (7,5 cm division)
Distance between segments
approx. 15 cm
Depth of fold approx. 7,5cm
Side seams approx. 6 cm, lower border
approx. 4 cm height
Weighting – flat aluminium profile,
3 x 25 mm

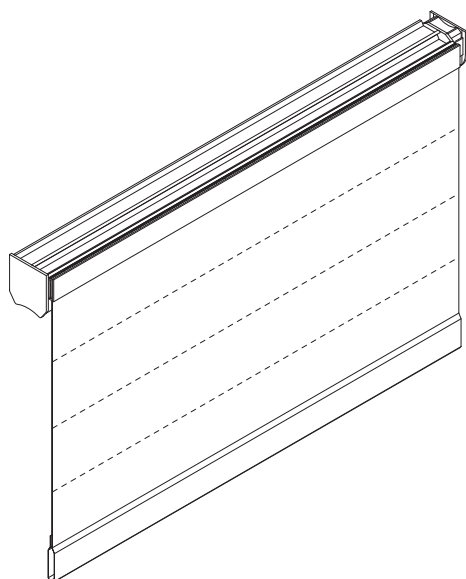


Making-up type B


Reverse surface, horizontal sewn-on,
transparent insertion tape
Robust circular insertion rod ø
ca. 4 mm
Distance between segments approx.
20-30 cm, depending on height
Depth of fold approx. 10–15 cm
Side seams approx. 1 cm, lower border
approx. 4 cm height
Weighting-Flat aluminium profile
3 x 25 mm

Curtain stack on top:
Abt. 15–20% of the height of curtain
(depending on the kind of fabric and
type of making up)


RAFFTRIC MAKING-UP ACCESSORIES

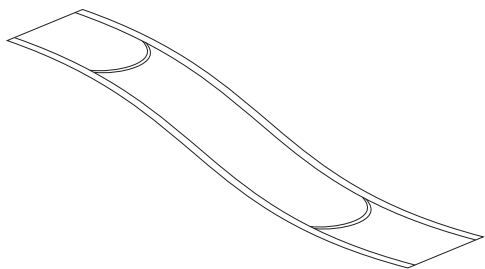


Transparent polyester loop tape with cross loops, 7,5 cm division, to sew on, width 20 mm (making-up type A)

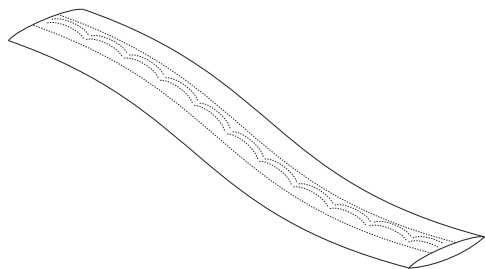


Transparent polyester insertion tape with longitudinal loops, to sew on, width 18 mm (making-up type B)

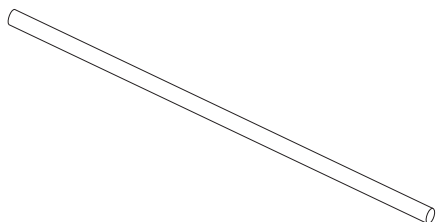

White circular insertion rod, light and robust, diameter 4 mm (making-up type B)




Transparent cord lock, to sew on




White polyamide hook-and loop tape, washable, to sew on, width 20 mm

MEASURING AND INSTALLATION

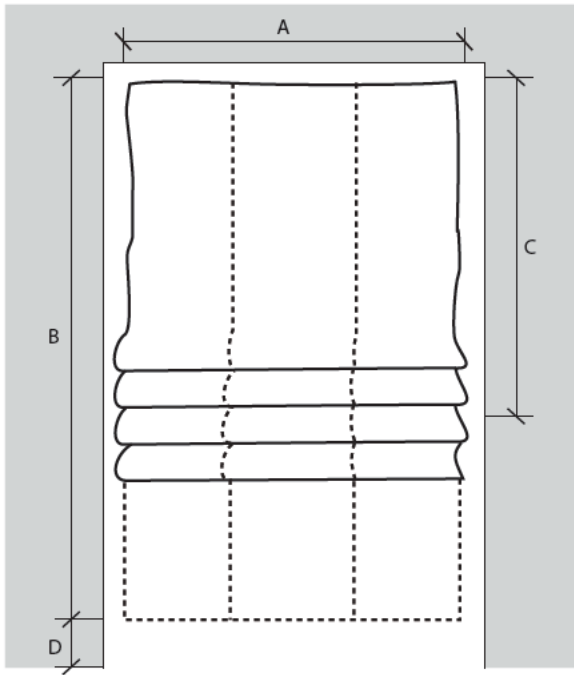

The roman blinds/systems are made to measure. The maximum system widths and heights are specified in the detailed technical sheet.

- A – Width of system: the width of the roman blind system
- B – Height of system: the distance between the top edge of the system and the bottom edge of the fabric (in the fully-extended condition)
- C – Please advise draw side and draw length
- D – Floor clearance

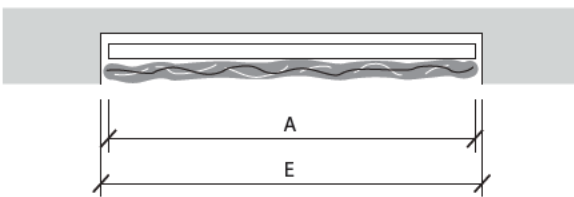

For bay windows or wall-to-wall fittings, please deduct approx. 1 cm from the bay or wall-to-wall measurement.

- E – Width of bay
- A – System width = width of bay minus 1 cm

Our comprehensive range and a complete list of our global sales outlets can be found at www.creationbaumann.com.

03/2011

Création Baumann AG
Bern-Zürich-Strasse 23 | CH-4901 Langenthal
Telephone +41 (0)62 919 62 62 | Fax +41 (0)62 922 45 47
mail@creationbaumann.com | www.creationbaumann.com

création **baumann**